

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

EndGlow® Cable

SPECIFICATIONS FEATURES



Construction:

EndGlow® cable is multi-strand fibers protected in a flexible PVC jacket for ease of handling and fiber protection.

Cabling:

Diameters are based on fiber quantity:

- 4 fibers:** .125" (3.2mm)
- 8 fibers:** .187" (4.8mm)
- 12 fibers:** .219" (5.5mm)
- 25 fibers:** .25" (6.35mm)
- 50 fibers:** .312" (7.9mm)
- 75 fibers:** .375" (9.5mm)
- 10 fibers:** .5" (12.5mm)
- 150 fibers:** .281" (15.1mm)
- 225 fibers:** .625" (15.9mm)
- 300 fibers:** .687" (17.5mm)

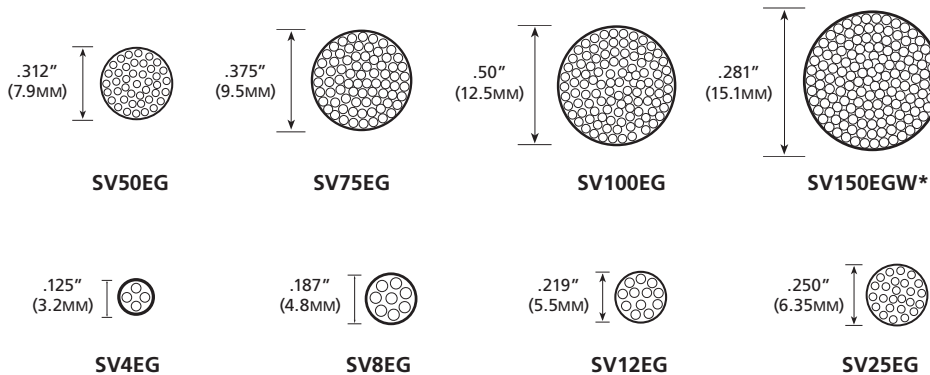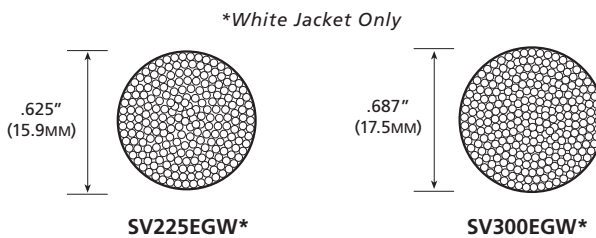

DESCRIPTION

EndGlow® is ideal for use with architectural lighting fixtures, landscape fixtures, water-tight lenses, feature lights, and adaptable for EndGlow® signage.

*Note: When ordering cable, specify length by quantity in terms of feet. Spools are established lengths and will not be cut shorter; if specific lengths are required, order each individual cable cut to length. SV150EG, SV225EG, SV300EG, SV100EG, SV150EGW, SV225EGW, and SV300EGW are not available in 1000' spool lengths.

ORDERING INFORMATION

MODEL

- SV4EG** - 4 FIBERS
- SV8EG** - 8 FIBERS
- SV12EG** - 12 FIBERS
- SV25EG** - 25 FIBERS
- SV50EG** - 50 FIBERS
- SV75EG** - 75 FIBERS
- SV100EG** - 100 FIBERS
- SV150EGW** - 150 FIBERS
- SV225EGW** - 225 FIBERS
- SV300EGW** - 300 FIBERS

Ordering Example: **SV4EG**