

EVPS25 POWER SUPPLY

SPECIFICATIONS FEATURES

Output Power Min: 2.3W

Output Power Max: 25.5W

Output Current Max: 2.1A

Listing: UL Class 2

AC input:

WAGO 2-pin wire trap, 18 AWG solid or tinned standard wire, Line (Black), Neutral (White)

Volts (60 Hz): 120 +/- 10%

Power Max (W): 21.5

Current Max (A): 0.20

12VDC Output:

WAGO 4-pin wire trap, 20AWG solid or tinned standard wire, Positive (Red), Negative (Blue)

Max Allowable Case Temperature: 85°C

Weight: 0.32 lb



DESCRIPTION

Features:


- Damp location rated
- Small, compact size
- Inherent short circuit protection
- Extreme low temperature performance (-40C)
- Tightly regulated output (1% line, 5% load)
- High power factor

Benefits:

- Limited output voltage and current plus isolation for safe operation
- Suitable for use in self-contained signs and raceways
- Facilitates use in self-contained signs for the simplest and most economical final installation
- Added safety without any troublesome fuses
- Allows use in any outdoor application
- Consistent light output regardless of line and load levels
- Minimizes amperage draw to reduce the number of power feeds required
- Peace of mind for your sign from the industries most trusted component maker

LED Electronic Driver:

- Square housing, Compact size
- DC constant voltage output
- Reliability
- Power efficiency
- Meets UL, CSA, FCC application requirements

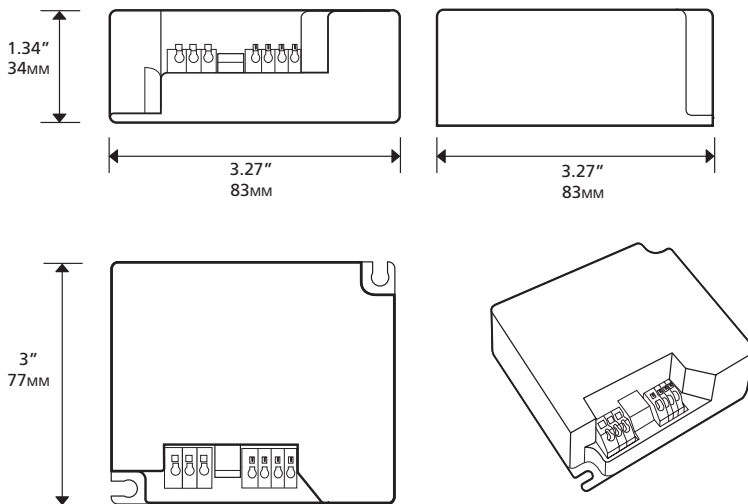

ORDERING INFORMATION

MODEL

EVPS25

25W - 12VDC ETL LISTED POWER SUPPLY - 1 YEAR WARRANTY

EVPS25-UL

25W 12VDC UL CLASS B POWER SUPPLY - 5 YEAR WARRANTY