

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

FiberPro

SPECIFICATIONS FEATURES

UL Listed:

Wet and dry locations
 UL file No.E202257

Electrical Rating:

120 VAC, 60 Hz / 4.5 A (start up)
 120 VAC, 60 Hz / 2.3 A (running)
 220-240 VAC, 50 Hz, 3.5 A (start up)
 220-240 VAC, 60 Hz, 2.0 A (running)

Lamp:

- 150 watt metal halide
- 10,000 hours average rated life
- Vision 2 Technology

Fiber Capacity:

- 500 fibers w/ 0.75mm fibers
- 288 fibers - Ultra SideGlow®(1mm)

Power Consumption:

300 Watts, maximum

Safety Features:

Internal 185°F / 85°C thermal protector

Ambient Operating Temperature:

-20°F to 110°F (-29°C to 44°C)

Dimensions:

8.5"(W) x 14.625" (L) x 6.125" (H)
 216MM x 372MM x 156MM
 14.125"H (359MM) with door open
 Allow an additional 5" (127mm) for fiberhead and fiber to "W" position

Weight: 23 lb (10.5 kg)

Material / Finish:

Galvanneal, Powder coating, no bare metal inside or outside, Water, corrosion and chemical resistant

Mounting / Installation:

Surface or wall mount
Must be flush mounted to surface for proper air separation between compartments.

Ventilation:

- 115 CFM enclosure cooling
- 28 CFM fiber tunnel cooling
- Recommended distance from surface, 6"
- Recommended distance from another light source, 24"

Standards:

UL / cUL

IP Rating:

23

dB Ratings:

- FiberPro:52dbA
- FiberPro-Q:35dbA


Warranty:

2 Year (excluding lamp)



DESCRIPTION

The **FiberPro** is a wet and dry UL listed illuminator with a 150 watt metal halide lamp rated at 10,000 hours average life. Recommended for SideGlow® and EndGlow® cable, interior and exterior applications.

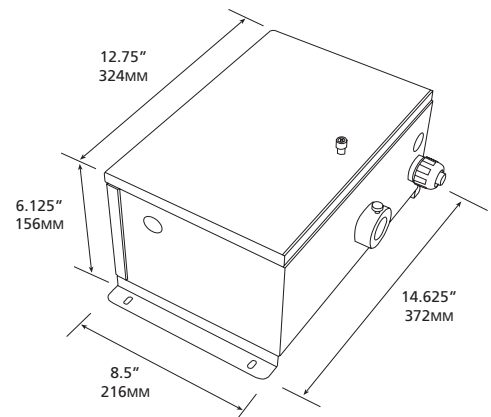

ORDERING INFORMATION

MODEL	LAMP	POWER	COLOR WHEELS	CONTROL SYSTEM
FIBERPRO	40-GA	120 - 120 VAC, 60Hz	45-SB - 4 COLOR STANDARD	N - NONE
FIBERPRO-Q	4,000 K	220 - 220 VAC, 50Hz	85-SB - 8 COLOR STANDARD	D - DMX
QUIET VERSION	30-GA	230 - 230 VAC, 50Hz	4C-SB - 4 COLOR CUSTOM	S3 - SV300C
	3,000 K	240 - 240 VAC, 50Hz	8C-SB - 8 COLOR CUSTOM	S6 - SV600C
		277 - 277 VAC, 60Hz*	45-SBDMX - 4 COLOR STANDARD DMX	
		*NOT AVAILABLE WITH SYNCHRONOUS CONTROL	85-SBDMX - 8 COLOR STANDARD DMX	
			4C-SBDMX - 4 COLOR CUSTOM DMX	
			8C-SBDMX - 8 COLOR CUSTOM DMX	
			SVDIMWHEEL - DIMMING WHEEL	

NOTE: Refer to pages 50-51 for detailed color wheel information

FIBERPRO

Ordering Example: FIBERPRO-40-GA-120-45-SB-N