

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

Fixed Down Light

SPECIFICATIONS FEATURES

Construction:


Fixture housing is made of machined brass or aluminum and finished for lasting beauty and durability. Finishes include natural brass and aluminum, black aluminum and white aluminum. Spring or screw mounting secures fixtures tightly into walls and ceilings. Compression fitting hold fibers tightly into fixture. 2" (50mm) diameter.

Cabling:

The FD-700 series accommodates up to a 150-strand EndGlow cable




(see EndGlow Cable spec sheet for detailed cable information)

Warranty: 2 years

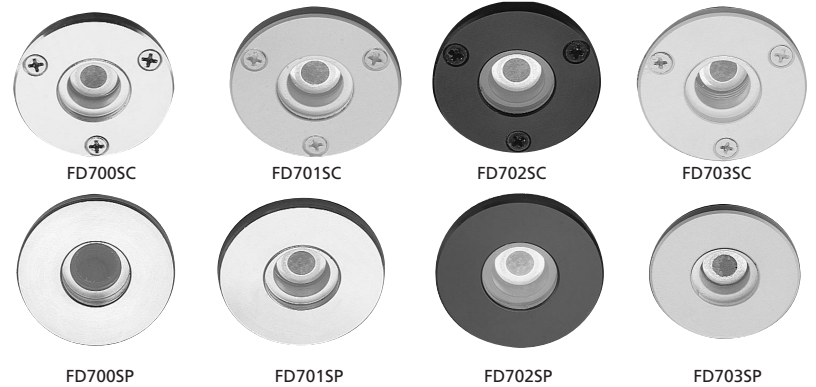

DESCRIPTION

The FD-700 Series **Fixed Downlight** accommodates greater fiber quantities to provide greater amounts of light for more traditional downlight applications. A choice of mounting styles adds installation versatility to any application. A variety of finishes are available to suit any architectural, commercial or retail decor. The FD-700 series is designed to work with EndGlow cabling.

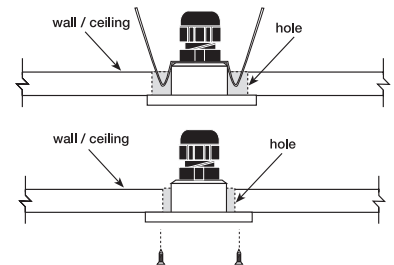

ORDERING INFORMATION

MODEL

- FD700 - BRASS
- FD701 - ALUMINUM
- FD702 - ALUMINUM-BLACK
- FD703 - ALUMINUM-WHITE

MOUNT

- SC - SCREW MOUNT
- SP - SPRING MOUNT

ENDGLOW CABLES

- (ORDER SEPARATELY)
- SV4EG - 4 FIBERS
 - SV8EG - 8 FIBERS
 - SV12EG - 12 FIBERS
 - SV25EG - 25 FIBERS
 - SV50EG - 50 FIBERS
 - SV75EG - 75 FIBERS
 - SV150EGW - 150 FIBERS

Ordering Example: **FD700 - SC**