

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

COPYRIGHT © 2008 NEXXUS LIGHTING, INC.
XB-NX

LiveLED™ 100

SPECIFICATIONS FEATURES

Construction:

Extruded, aluminum housing and mounting yoke. Gasket sealed for all weather operation.

**Available in custom finishes.*

Lumen Output:

Up to 1800 lumens

Lamp Life:

70% lumen maintenance at 50,000 hours

Optics:

7 Degree Parabolic Reflectors, secondary lens options

Voltage:

100-240VAC Auto Sensing Power Supply

Wattage:

100 LED Watts, 117 Watt total power

Control System:

DMX 512 with master/slave or active control via USITT standard XLR in/out connectors (3 pin standard, 5 available upon request). 49 on board programmed effects controlled via chassis mounted rotary knobs.

Secondary Lens:

Narrow, Oval or Wide Flood optic options

Driver:

Proprietary LED driver system driving 44 LED with 22/11/11 - RGB

Weight:

13 lbs. (5.89 kg)

Dimensions:

6.0" (L) x 10.75" (W) x 9.0" (H)

152.4 MM (L) x 273 MM (W) x 228.6 MM (H)

Operational Environment:

-30°F to 140°F (-35°C to 60°C)

Listings:



UL / cUL listed

Ratings:

IP65

Warranty:

2 years

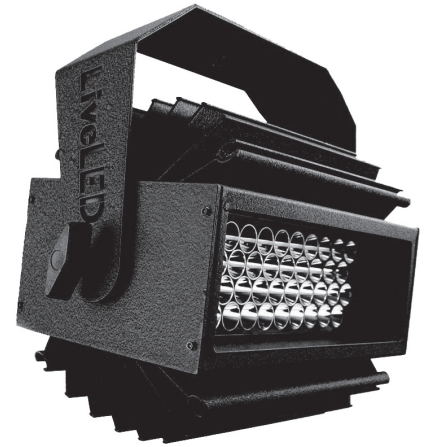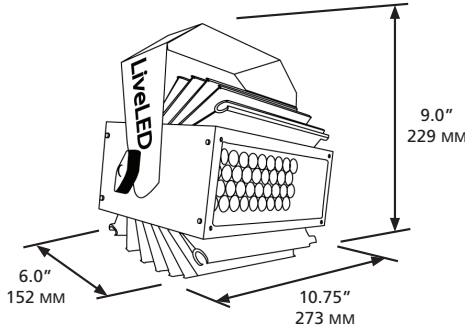

DESCRIPTION

The **LiveLED™ 100** is a high performance LED - RGB color-changing, yoke mounted luminaire for indoor and outdoor venues and applications. The LiveLED 100 features an integrated power supply and DMX control system with no external components and no intake/exhaust fan. Smooth RGB color mixing and full range dimming allow for 16.7 million colors and a variety of effects including variable speed cross fades, variable speed color changes, strobos and more. The unit may be operated with DMX controllers, in master / slave synchronization with other units (with or without a controller), and in stand-alone mode with 49 pre-programmed effects.



Features officially licensed technology from Color Kinetics; patent numbers 6.016.038, 6.150.774

ORDERING INFORMATION

MODEL

ALS-LLED-100*

**Call Manufacturer for available custom finishes.*

LENS INCLUDED

N NARROW (7°)

F FLOOD (22°)

W WIDE FLOOD (45°)

ACCESSORIES

PIPE CLAMP

SAFETY CABLE

CONTROL CABLE

EXTERIOR GRADE DMX CABLES
INCLUDING CONNECTORS

ALS-LLED-100 — — — — —

Ordering Example: **ALS-LLED-100 - N**