

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

COPYRIGHT© 2008 NEXXUS LIGHTING, INC.

# LiveLED™ 12

## SPECIFICATIONS FEATURES

### Construction:

Cast, machined and powder coated aluminum housing with integrated heat sink, formed and powder coated CRS yoke, gasket sealed available for damp locations. This unit is also available for flush mount downlight with flange instead of yoke.

### Lumen Output:

230 lumens

### Voltage:

12VDC MAX

### Control System:

DMX 512 with master/slave or active control via standard XLR connectors (3 pin standard, 5 pin available upon request)

**Driver:** Proprietary LED driver technology driving 7 LED's (3 red, 2 green, 2 royal blue)

**Weight:** 1 lb. (0.45 kg)

### Dimensions:

1.7" (L) x 2.5" (W) x 3.0" (H)

43.18 MM (L) x 63.5 MM (W) x 76.2 MM (H)

### Location Listing:

Damp or Dry


### Environmental Temperature:

-25°C to 60°C (-30°F to 140°F)

### Installation:

Any Orientation

**Warranty:** 2 years

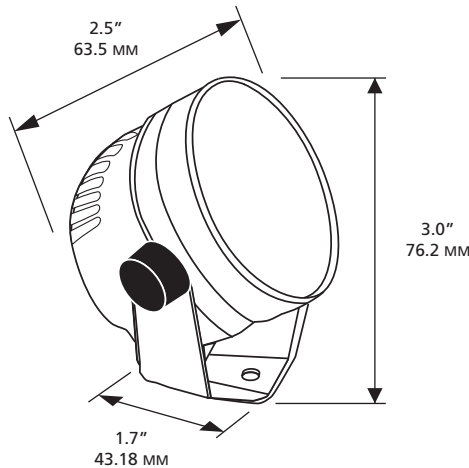

LIVELED 12 - YOKE MOUNT VERSION

## DESCRIPTION

The **LiveLED™ 12** is a LED - RGB color-changing, yoke mounted luminaire for indoor and outdoor venues and applications. The LiveLED 12 features an integrated off board power supply with DMX 512 control system.

Smooth RGB color mixing and full range dimming allow for 16.7 million colors and a variety of effects including variable speed cross fades, variable speed color changes, strobos and more. The unit may be operated with DMX controllers, in master / slave synchronization, with other units (with or without a controller), and in stand-alone mode with 49 pre-programmed effects.

*This unit is also available for flush mount downlight with flange instead of yoke.*



**COLOR KINETICS** Features officially licensed technology from Color Kinetics; patent numbers 6.016.038, 6.150.774

## ORDERING INFORMATION

### MODEL

ALS-LLED12

### FIXTURE OPTIONS

3 FIXTURES

6 FIXTURES

9 FIXTURES

12 FIXTURES

### FEATURE OPTIONS

Y YOKE MOUNT

F FLANGE MOUNT

### ACCESSORIES

Power Control Cable

Controller Powersupply

ALS-LLED12 — — —

Ordering Example: ALS-LLED12 - 3 - Y