

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

LiveLED™ 12/35 Power Supply & Controller

SPECIFICATIONS FEATURES

Construction:

ABS Plastic Housing

Voltage:

100-240 VAC 50/50 Hz Auto-Regulated

Driver:

Proprietary LED driver Technology

Weight:

4 lbs. (1.81 kg)

Dimensions:

6.0" (L) x 11" (W) x 4.0" (H)

152.0 MM (L) x 279.0 MM (W) x 101.6 MM (H)

Environmental Temperature:

-35C to 60C (-30F to 140F)

Environment:

Indoor / Outdoor




Warranty: 2 years

Listing: ETL cETL



DESCRIPTION

- Operates up to 12 LiveLED 12 or 4 LiveLED 35 Fixtures
- Operates up to 4 Live LED 35's
- Indoor / Outdoor
- 49 On Board Programmed Effects
- DMX 512 With Master/Slave Via Standard 3 Pin XLR Connectors

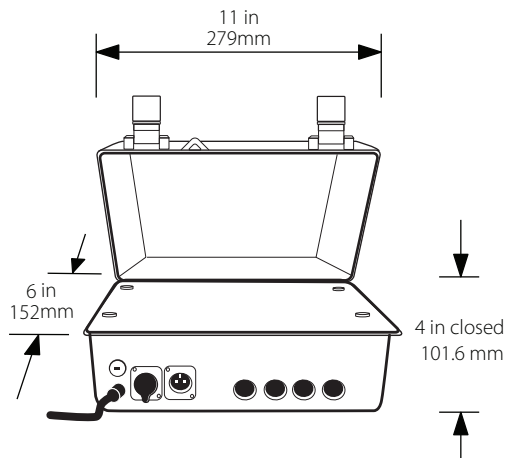

ORDERING INFORMATION

MODEL

ALS-LL35-CNTRL-1	LIVELED™ 35 SINGLE FIXTURE
ALS-LL35-CNTRL-2	LIVELED™ 35 (2) FIXTURES
ALS-LL35-CNTRL-3	LIVELED™ 35 (3) FIXTURES
ALS-LL35-CNTRL-4	LIVELED™ 35 (4) FIXTURES
ALS-LL12-CNTRL -1	LIVELED™ 12 SINGLE FIXTURE
ALS- LL12-CNTRL -3	LIVELED™ 12 (3) FIXTURES
ALS- LL12-CNTRL -6	LIVELED™ 12 (6) FIXTURES
ALS- LL12-CNTRL -9	LIVELED™ 12 (9) FIXTURES
ALS- LL12-CNTRL -12	LIVELED™ 12 (12) FIXTURES

ALS-LL35-CNTRL-1

Ordering Example: **ALS-LL35-CNTRL-1**