

PROJECT:	TYPE:
VOLTAGE:	COMMENTS:

# Super NiteLyte™

## SPECIFICATIONS FEATURES

**Construction:**

Materials & Components: Molded acrylic mycrolenz.

**Dimensions:**

2.86" (L) X 3.12" (DIAMETER)

72.63 MM (L) X 79.21 MM (DIAMETER)

**Installation:**

Yoke mounted. (Adjustable)

EEF end element ferrule to accommodate specific cable fiber counts. EEF Focus allows for variable focal length.

PG Ferrule for outdoor application.

**Warranty:**


2 year limited



## DESCRIPTION

**Applications:** Up lighting, pin spot lighting, long throw down lighting for retail, display, commercial and theme environments.

- 7° spot lens (50-60' throw)
- Machined aluminium
- Fixture holds up to 75 (1mm) fibers
- Mycrolenz optics
- Using the optional Foccus Ferrels, spot can be adjusted from 7° to 60°

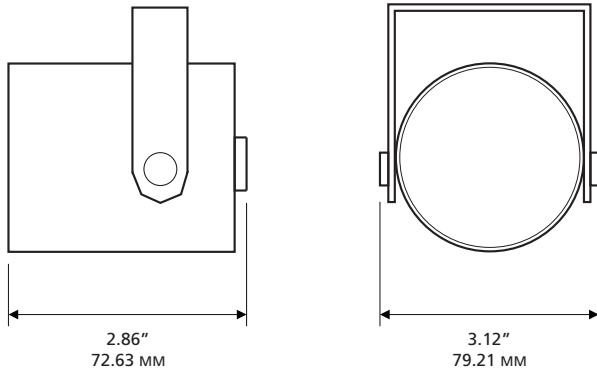

## ORDERING INFORMATION

MODEL	LENS OPTIONS	FERRULE OPTIONS
ALS-SNL-1	I INTERIOR E EXTERIOR	EEF 7 7 END ELEMENT FERRULE EEF 19 19 END ELEMENT FERRULE EEF 37 37 END ELEMENT FERRULE EEF 61 61 END ELEMENT FERRULE EEF 37 Focus 37 END ELEMENT FERRULE FOCUS EEF 61 Focus 61 END ELEMENT FERRULE FOCUS

ALS-SNL-1 — — — — —

Ordering Example: ALS-SNL-1 - I