


# FULLMOON™ ASSEMBLY INSTRUCTIONS


E-1735  
11/00

Since your new pool light contains a fragile and expensive bulb, it has been specially packaged in order to prevent damage during shipping. Please follow these simple instructions to complete the assembly by installing the bulb, O-ring, lens and LensLok™ ring:


- 1 Step 1:** First, remove the light bulb from its small carton and install in the light socket. When properly installed, the loop spring will contact the bulb (except on 100 watt version).

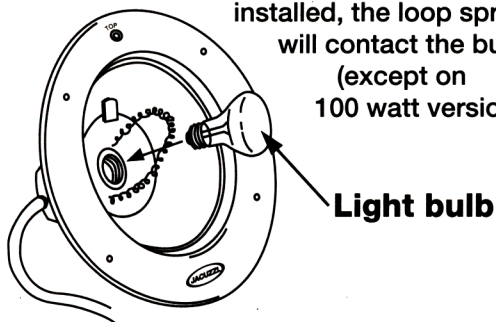


- 2 Step 2:** Remove the *pre-lubricated O-ring* from its bag and place inside the light housing as shown.

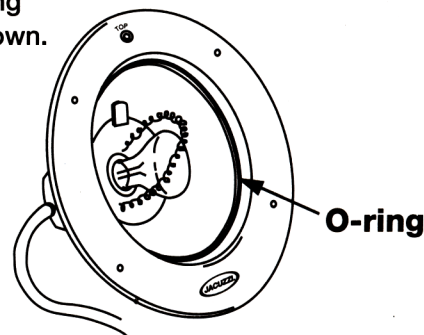


- 3 Step 3:** Place the lens inside the O-ring in the light housing. Be certain that the word "top" molded in the glass lens aligns with the word "top" stamped in the light housing.

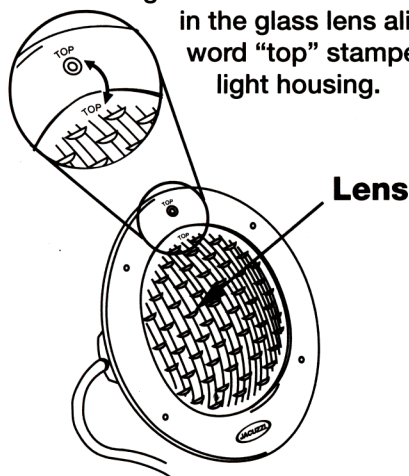

- 4 Step 4:** Insert one end of LensLok™ into groove between glass lens and light housing. Using your thumbs as shown, press the LensLok™ "in and down", moving around the light until approximately half of the LensLok™ is engaged in the slot.

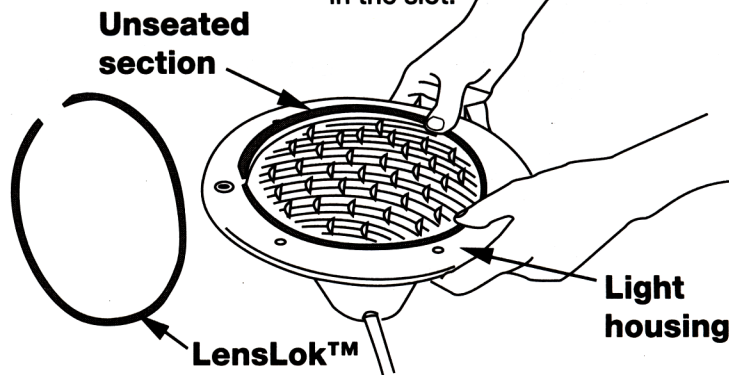

- 5 Step 5:** Holding the LensLok™ in place as shown, push the unseated end of the LensLok™ "in and down" until it engages in the slot between the light housing and the lens. This will leave a small portion of the LensLok™ still unseated.

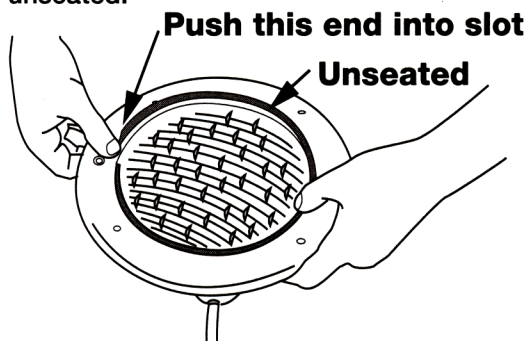

- 6 Step 6:** Place the palm of your hand on the lens next to the unseated section of the LensLok™. Press firmly "down and away" from the unseated section of LensLok™ and you will hear it "snap" into place. When properly engaged the two ends of the LensLok™ lie flat and **DO NOT** overlap.

